Insolroll Magnetic Charging Cable Routing Instructions

Scan for electronic version

Components

Insolroll provides two options for securing the 8-inch magnetic charging port.



(x1)
8-inch magnetic charging port



(x1)
Low profile cable tie



(x1)
¾-inch cable tie with zip tie

Installation

Magnetic charging cable should be fastened so the plug that goes into the motor head cannot be removed. Below are just two examples of how to implement these options. Alternative locations may suite your application better.







To be fastened with a small screw or rivet.




Cable tie has a sticky backing and comes with a small zip tie.

Insolroll Magnetic Charging Cable Routing Instructions

Additional Components

Each order must contain at least one charger and one 33-inch extension magnetic rigid cable.

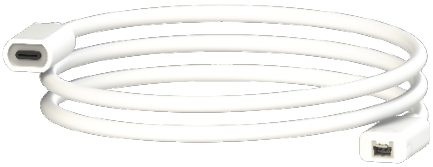

33-inch extension magnetic rigid cable



Standard charger

